


## 3" 30° Weld-in Flanges

316L flanges to be welded on tank bottoms

Perolo 3" 30° 316L stainless steel weld-in flanges are designed to be welded at the bottom of tank containers in order to fit valves for tank filling and discharge purposes.

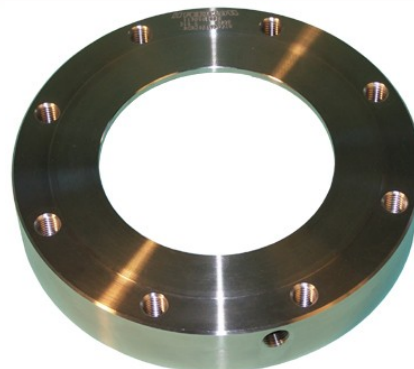

### Specifications

- 316L stainless steel construction
- Nominal diameter 3"
- Drillings depending on application
- Radiused angles
- Serrated gasket contact area

### Options

- Other diameter weld-in flanges
- Other materials (Aluminum, 304L, 904L...)
- Other drilling

11 91 17 00 00	
	<b>External diameter</b>
	200mm
	<b>Internal diameter</b>
	114.3mm
	<b>Thickness</b>
26.5mm	
<b>Drilling</b>	8xM12xPCD178mm

11 91 16 00 00	
	<b>External diameter</b>
	200mm
	<b>Internal diameter</b>
	114.3mm
	<b>Thickness</b>
35mm	
<b>Drilling</b>	8xM12xPCD178mm

11 93 63 00 00	
	<b>External diameter</b>
	200mm
	<b>Internal diameter</b>
	114.3mm
	<b>Thickness</b>
35mm	
<b>Drilling</b>	4xM16xPCD178mm 8xM12xPCD178mm

11 91 94 00 00		Blind provision with M12 screws
	<b>External diameter</b>	
	200mm	
	<b>Including</b>	8xH-M12-20 tack welded screws
	<b>Thickness</b>	
	26.5mm	
<b>Drilling</b>	8xM12xPCD178mm	

11 91 91 00 00	
	<b>External diameter</b>
	200mm
	<b>Thickness</b>
	35mm
	<b>Drilling</b>