


## 3" 45° Weld-in Flanges

316L flanges to be welded on tank bottoms

Perolo 3" 45° 316L stainless steel weld-in flanges are designed to be welded at the bottom of tank containers in order to fit valves for tank filling and discharge purposes.

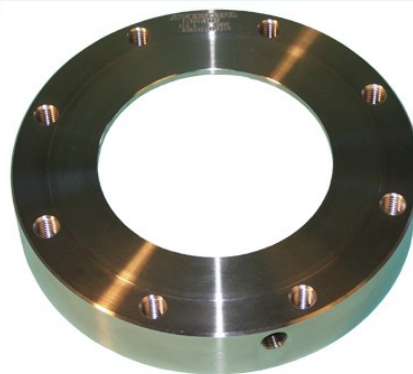

### Specifications

- 316L stainless steel construction
- Nominal diameter 3"
- Drillings depending on application
- Radiused angles
- Serrated gasket contact area

### Options

- Other diameter weld-in flanges
- Other materials (Aluminum, 304L, 904L...)
- Other drilling

11 90 59 00 00	
	<b>External diameter</b> 200mm
	<b>Internal diameter</b> 114.3mm
	<b>Thickness</b> 35mm
	<b>Drilling</b> 8xM12xPCD178mm

11 90 94 00 00	
	<b>External diameter</b> 200mm
	<b>Internal diameter</b> 114.3mm
	<b>Thickness</b> 45mm
	<b>Drilling</b> 8xM12xPCD178mm

11 92 46 00 00	
	<b>Blind provision with M12 screws</b>
	<b>External diameter</b> 200mm
	<b>Including</b> 8xH-M12-20 screws
	<b>Thickness</b> 26.5mm
	<b>Drilling</b> 8xM12xPCD178mm

11 90 58 91 00	
	<b>Blind provision with M12 screws</b>
	<b>External diameter</b> 200mm
	<b>Including</b> 8xH-M12-20 tack welded Screws & washers
	<b>Thickness</b> 26.5mm
	<b>Drilling</b> 8xM12xPCD178mm

11 90 64 00 00	
	<b>Steam heated</b>
	<b>External diameter</b> 200mm
	<b>Internal diameter</b> 114.3mm
	<b>Thickness</b> 36mm
	<b>Drilling</b> 8xM12xPCD178mm

11 90 58 00 00	
	<b>External diameter</b> 200mm
	<b>Internal diameter</b> 114.3mm
	<b>Thickness</b> 35mm
	<b>Drilling</b> 8xM12xPCD178mm