


3" Flanged TANKFLY™ ND80 Series Butterfly valve


The PEROLO 3" TANKFLY™ butterfly valve is designed to be used as a fluid inlet/outlet valve.

Made of 316L/1.4404 stainless steel, the 3" TANKFLY™ butterfly valve is applicable to tank containers, IBC's, rail tank cars, road tankers and static tanks dedicated to transporting or storing chemical and food grade fluids.

With a compact design, this product offers an easy opening/closing with a ¼ turn handling operation.

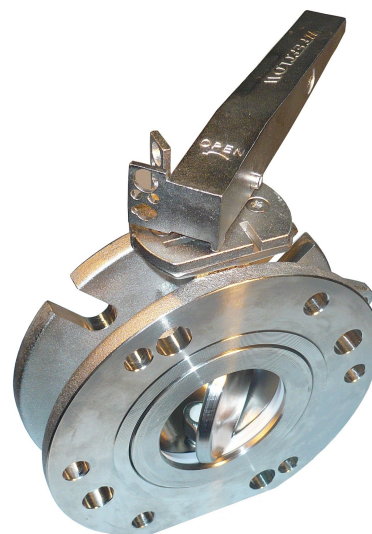

Specifications

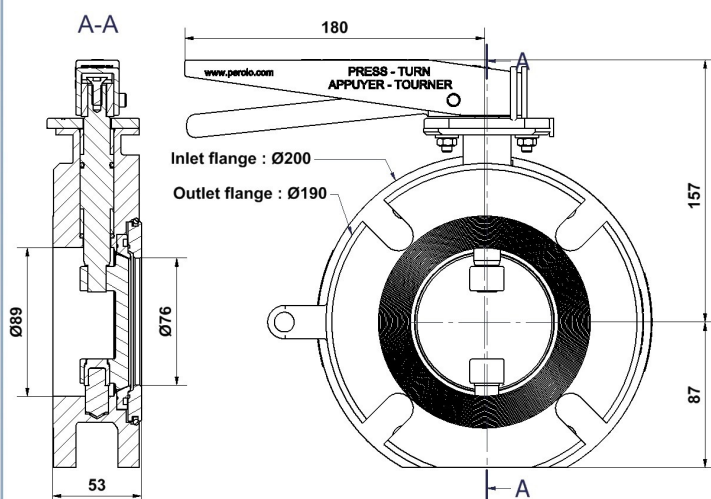

- Nominal Diameter : 3" (81mm)
- Weight : 7 kg
- Container flange : 6 x Ø14 on PCD168 & 4 x Ø18 on PCD160
- Outlet flange : 4 slots Ø18 on a PCD146
- MAWP : 6 bar
- Test pressure : 8 bar
- Design temperature : +190°C

Conformity & Certifications

- Comply with IMDG & ADR
- Approved by Lloyd's Register
- Comply with EN14432

Features

- 316L/1.4404 stainless steel construction
- Compact design. Face to face : 52mm
- Easy maintenance
- ¼ turn handling operation
- PTFE seals
- Pivot Pin Bracket

Options

- High Corrosion Resistance with :
 - HALAR® coating body
 - Closure plate, spindle & seal clamp in Hastelloy C276.

Part # 11 12 22 00 00

Accessories

3" TANKFLY™	11 12 31 00 00
Dished Blind Flange	11 90 41 00 00
Weld in flange	11 90 36 00 00
Recessed flange	11 90 98 00 00
Pivot Pin	12 91 52 00 00
Gasket	12 91 40 00 00
Screw Kit 4 X HM16	12 91 61 92 00